



NETGEAR®

Installation Guide
Connect with Innovation™


Gigabit Ethernet Switch GS308

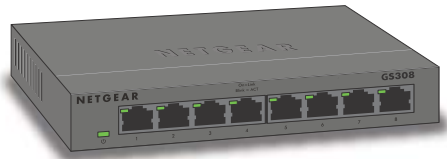

Step 1. Connect equipment

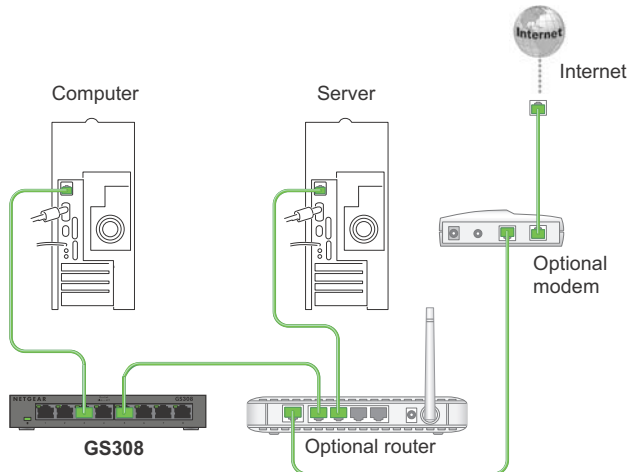

Step 2. Connect power

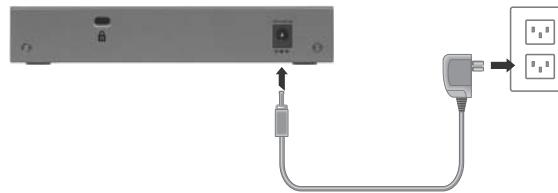

Step 3. Check status



Power LED

- On
- Off

Port LEDs

- Ethernet link
- Activity (blinking)
- No link (off)

| Specifications | Description |
|---------------------------|---|
| Network interface | RJ-45 connector for 10BASE-T, 100BASE-TX, or 1000BASE-T |
| Network cable | Category 5 (Cat 5) or better Ethernet cable |
| Ports | 8 |
| Power adapter | 12V @ 1.0A DC input |
| Power consumption | 3.8W max |
| Weight | 0.40 Kg (0.88 lbs) |
| Dimensions (W x D x H) | 158 mm x 102 mm x 26 mm (6.22 in. x 4.02 in. x 1.02 in.) |
| Operating temperature | 0°–40° C (32°–104° F) |
| Operating humidity | 10%–90% relative humidity, noncondensing |
| Certifications | CE mark, CB, CE Class B, C-Tick Class B |



201-16291-03

January 2013

For the current EU Declaration of Conformity, visit
http://support.netgear.com/app/answers/detail/a_id/11621/.

Technical Support

Thank you for selecting NETGEAR products.

After installing your device, locate the serial number on the label of your product and use it to register your product at <https://my.netgear.com>.

You must register your product before you can use NETGEAR telephone support. NETGEAR recommends registering your product through the NETGEAR web site. For product updates and web support, visit <http://support.netgear.com>.

NETGEAR recommends that you use only the official NETGEAR support resources.

NETGEAR, the NETGEAR logo, and Connect with Innovation are trademarks and/or registered trademarks of NETGEAR, Inc. and/or its subsidiaries in the United States and/or other countries. Information is subject to change without notice. Other brand and product names are registered trademarks or trademarks of their respective holders. © NETGEAR, Inc. All rights reserved.

Intended for indoor use only in all EU member states, EFTA states, and Switzerland.