





**Zero 2 Bluetooth gamepad – instruction manual**



- press **start** to turn on the controller
- press & hold **start** for 3 seconds to turn off the controller
- press & hold **start** for 8 seconds to force turn off the controller

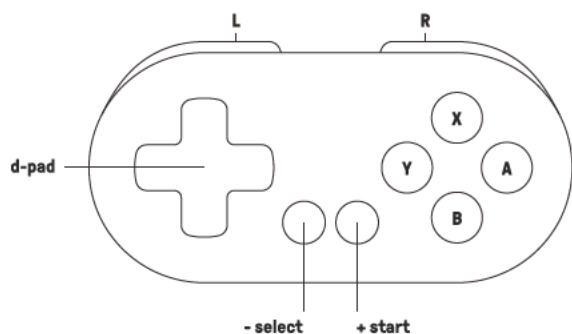

**Zero 2 蓝牙手柄 — 使用说明**

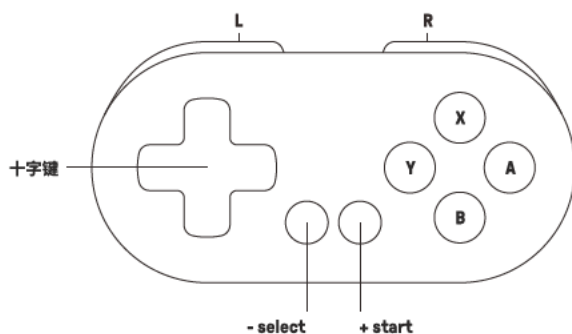

- \* 开机: 按 [start] 键。
- \* 关机: 按住 [start] 键 3 秒。
- \* 强制关机: 按住 [start] 键 8 秒。

**Switch**



- 1 – press **Y & start** to turn on the controller. Blue LED blinks 4 times per cycle
  - 2 – press **select** button for 3 seconds to enter its pairing mode. LED starts to rapidly blink
  - 3 – go to your Switch Home Page to click on Controllers, then click on Change Grip/Order. Blue LED becomes solid when connection is successful
  - 4 – controller will auto reconnect to your Switch with the press of **start** once it has been paired
- when connected to your Switch, **select + Dpad\_Down** = Switch HOME button, **select + start** = Switch ZL + ZR button

**Switch**



1. 轻按 [Y + start] 开启手柄, 蓝色指示灯闪烁 4 下 / 次。
  2. 按住 [select] 键 3 秒进入配对状态, 蓝色指示灯快速闪烁。
  3. 打开 Switch 主机“手柄”选项, 进入“更改握法 / 顺序”, 等待手柄连接。连接完成后蓝色指示灯常亮。
  4. 成功配对连接后, 下次使用按 [start] 键开启可自动回连。
- \* select + Dpad\_down 组合键为 Switch 的 Home 键, select + start 组合键为 Switch 的 ZL + ZR 键。

**Windows (X - input)**



- 1 – press **X & start** to turn on the controller. Blue LED blinks twice per cycle
  - 2 – press **select** button for 3 seconds to enter its pairing mode. LED starts to rapidly blink
  - 3 – go to your Windows device's Bluetooth setting, pair with [8BitDo Zero 2 gamepad]. Blue LED becomes solid when connection is successful
  - 4 – controller will auto reconnect to your Windows device with the press of **start** once it has been paired
- when connected to your Windows, **select + Dpad\_Down** = HOME button

**Windows (X - input)**



1. 轻按 [X + start] 键开启手柄, 蓝色指示灯闪烁 2 下 / 次。
  2. 按住 [select] 键 3 秒进入配对状态, 蓝色指示灯快速闪烁。
  3. 打开 Windows 设备蓝牙, 搜索 [8BitDo Zero 2 gamepad] 连接, 连接完成后蓝色指示灯常亮。
  4. 成功配对连接后, 下次使用按 [start] 键开启可自动回连。
- \* select + Dpad\_down 组合键为 Home 键。

**Android**



- 1 – press **B & start** to turn on the controller. Blue LED blinks once per cycle
- 2 – press **select** button for 3 seconds to enter its pairing mode. LED starts to rapidly blink
- 3 – go to your Android device's Bluetooth setting, pair with [8BitDo Zero 2 gamepad]. Blue LED becomes solid when connection is successful
- 4 – controller will auto reconnect to your Android device with the press of **start** once it has been paired

**Android**



1. 轻按 [B + start] 键开启手柄, 蓝色指示灯闪烁 1 下 / 次。
2. 按住 [select] 键 3 秒进入配对状态, 蓝色指示灯快速闪烁。
3. 打开 Android 设备蓝牙, 搜索 [8BitDo Zero 2 gamepad] 连接, 连接完成后蓝色指示灯常亮。
4. 成功配对连接后, 下次使用按 [start] 键开启可自动回连。

**macOS**



- 1 – press **A & start** to turn on the controller. Blue LED blinks 3 times per cycle
- 2 – press **select** button for 3 seconds to enter its pairing mode. LED starts to rapidly blink
- 3 – go to your macOS device's Bluetooth setting, pair with [Wireless Controller]. Blue LED becomes solid when connection is successful
- 4 – controller will auto reconnect to your macOS device with the press of **start** once it has been paired

**macOS**



1. 轻按 [A + start] 键开启手柄, 蓝色指示灯闪烁 3 下 / 次。
2. 按住 [select] 键 3 秒进入配对状态, 蓝色指示灯快速闪烁。
3. 打开 macOS 设备蓝牙, 搜索 [Wireless Controller] 连接, 连接完成后蓝色指示灯常亮。
4. 成功配对连接后, 下次使用按 [start] 键开启可自动回连。

**Keyboard mode**



- 1 – press **R & start** to turn on the controller. Blue LED blinks 5 time per cycle
  - 2 – press **select** button for 3 seconds to enter its pairing mode. LED starts to rapidly blink
  - 3 – go to your device's Bluetooth setting, pair with [8BitDo Zero 2 gamepad]. Blue LED becomes solid when connection is successful
  - 4 – controller will auto reconnect to your device with the press of **start** once it has been paired
- on keyboard mode, please make sure the input language on your device is in English

**键盘模式**



1. 轻按 [R + start] 键开启手柄, 蓝色指示灯闪烁 5 下 / 次。
  2. 按住 [select] 键 3 秒进入配对状态, 蓝色指示灯快速闪烁。
  3. 打开设备蓝牙, 搜索 [8BitDo Zero 2 gamepad] 连接, 连接完成后蓝色指示灯常亮。
  4. 成功配对连接后, 下次使用按 [start] 键开启可自动回连。
- \* 键盘模式下, 所有按键输出皆为键盘英文字符。

**battery**



- |                       |   |                        |
|-----------------------|---|------------------------|
| <b>status –</b>       | → | <b>LED indicator –</b> |
| low battery mode      | → | red LED blinks         |
| battery charging      | → | red LED stays solid    |
| battery fully charged | → | red LED turns off      |

- built-in 180 mAh Li-ion with 8 hours of play time
- rechargeable via USB cable with 1 - 2 hour charging time

**电池**



- |             |   |                |
|-------------|---|----------------|
| <b>电源状态</b> | → | <b>电源指示灯状态</b> |
| 低电量         | → | 红灯闪烁           |
| 充电中         | → | 红灯常亮           |
| 充电完成        | → | 红灯熄灭           |

- \* 内置 180mAh 锂聚合物电池, 充电约 1 - 2 小时, 可持续使用约 8 小时。
- \* 充电时长及续航时间可能受环境因素影响会有所不同。

**power saving**



- sleep mode - 15 minutes with no use
- press **start** button to wake up the controller

**自动关机**



- \* 开机后 1 分钟内无连接或连接后 15 分钟无操作会自动关机。
- \* 使用时按 [start] 键唤醒可自动连接。

**support**



- please visit [support.8bitdo.com](http://support.8bitdo.com) for further information & additional support

**固件升级**



- \* 请访问 [support.8bitdo.cn](http://support.8bitdo.cn) 了解详细信息。